


Product data sheet

Standard touch dimmer insert LED

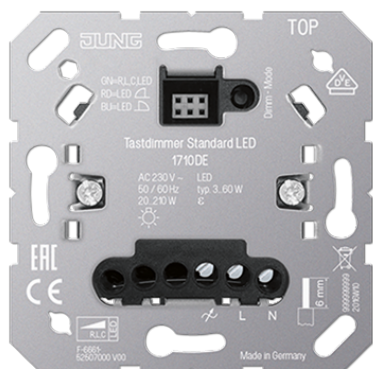

Reference number

1710 DE

Standard touch dimmer insert LED

without satellite input

for covers JUNG HOME ref.-no.: BT .. 17101 .., BT .. 17102 .., BT .. 17181 .., BT .. 17182 ..

for covers eNet ref.-no.: FM .. 1700 .., FM .. 1701 ..

for covers LB Management ref.-

no.: .. 1700 .., .. 1701 .., .. 1750 D .., .. 1751 BT .., .. 17180 .., .. 17280 .., .. 17181 .., .. 17281 .., DWPM 17360 ..

for covers KNX RF ref.-no.: .. 10911 ST RF .., .. 10921 ST RF ..

Intended use

- Switching and dimming of lighting
- Operation with suitable cover
- Installation in flush box with dimensions according to DIN 49073

Product characteristics

- Device works according to the leading edge phase control or trailing edge phase control principle
- Automatic or manual setting of the dimming principle suitable for the load
- Display of the set operating mode by means of LED
- Device can be operated without neutral conductor
- Switch-on via bulb-preserving soft start
- Switch-on with last brightness or saved switch-on brightness
- Switch-on brightness can be saved permanently
- Minimum brightness can be saved permanently
- Electronic short-circuit protection with permanent switch-off after 7 seconds at the latest
- Electronic over-temperature protection
- Test operation for functional test
- Power extension possible by means of power boosters (ref.-no. ULZ 1755 REG)
- Optional accessory: compensation module LED, ref.-no.: KM LED 230 U

Covers:

LB Management push-button 1-gang: .. 1700 .., .. 1701 ..

Universal timer Bluetooth®: .. 1751 ..

LB Management timer display: .. 1750 D ..

LB Management motion detector 1.1 m: .. 17180 ..

Universal automatic switch 1.1 m: .. 17181 ..

LB Management motion detector 2.2 m: .. 17280 ..

Universal automatic switch 2.2 m: .. 17281 ..

Motion and presence detector: DWPM 17360 ..

Technical data

Rated voltage:	AC 230 V ~
Mains frequency:	50/60 Hz
Power loss:	approx. 2 W
Ambient temperature:	-5 ... +45 °C
Connected load at 25 °C	
Incandescent lamps:	20 ... 210 W

HV halogen lamps:	20 ... 210 W
Electronic transformers:	20 ... 210 W
Electronic transformers with LV LED:	typical 20 ... 60 W
Inductive transformers:	20 ... 210 VA
Inductive transformers with LV LED:	typical 20 ... 60 VA
Dimmable HV LED lamps:	typical 3 ... 60 W
Dimmable compact fluorescent lamps:	typical 3 ... 60 W
With setting "LED trailing edge phase control" the max. connection power for HV LED lamps and electronic transformers with LV LED doubles.	
Ohmic-capacitive:	20 ... 210 W
Capacitive-inductive:	not permitted
Ohmic-inductive:	20 ... 210 VA
Ohmic and HV LED:	typical 3 ... 60 W
Ohmic and CFL:	typical 3 ... 60 W
Amplifiers:	see instructions for amplifier
Connection	screw terminals
single wire:	1 x 0.5 ... 4.0 mm ² 2 x 0.5 ... 2.5 mm ²
stranded without ferrule:	1 x 0.5 ... 4.0 mm ² 2 x 0.5 ... 2.5 mm ²
stranded with ferrule:	1 x 0.5 ... 4.0 mm ² 2 x 0.5 ... 1.5 mm ²
Total length power cable:	max. 100 m

