


Description: 1-gang push-button (1-pole, 1-way)


Ref.-no.: 534 U

illumination possible with lamp

Can be converted into pull cord push-button by means of pull cord insert.

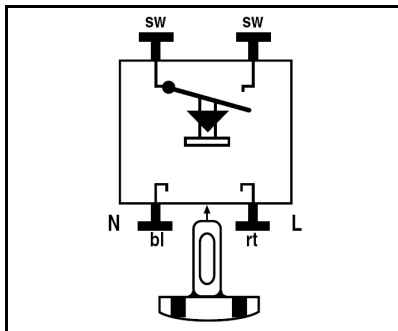

Contact assignments

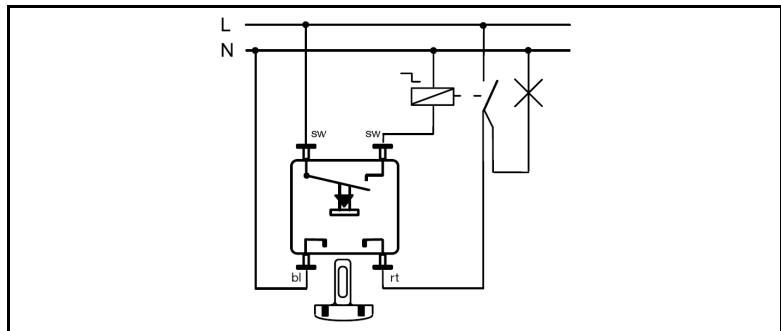

Wiring diagrams
534 U

Technical data

Switching voltage:	AC 250 V ~
Switching current:	10 A
Connection:	screwless terminals
Switch type:	1-pole, 1-way (make contact)

Accessories

Lamp:	Ref.-no.:	90 (230 V, 1.1 mA)
	Ref.-no.:	95 (230 V, 0.5 mA)
	Ref.-no.:	96-12 (12 V, 40 mA)
	Ref.-no.:	96-24 (24 V, 25 mA)
	Ref.-no.:	96-36 (36 V, 20 mA)
LED lamp:	Ref.-no.:	96-48 (48 V, 25 mA)
	Ref.-no.:	961248 LED RT (red 12 – 48 V, ca. 4 mA)
	Ref.-no.:	961248 LED GN (green 12 – 48 V, ca. 4 mA)
	Ref.-no.:	90-LED RT (red 230 V, ca. 1.1 mA)
Pull cord insert:	Ref.-no.:	90-LED GN (green 230 V, ca. 1.1 mA)
	Ref.-no.:	34
	Ref.-no.:	34 KO5