rond

unifit hardwired type E/F Ø45

installation instruction

1

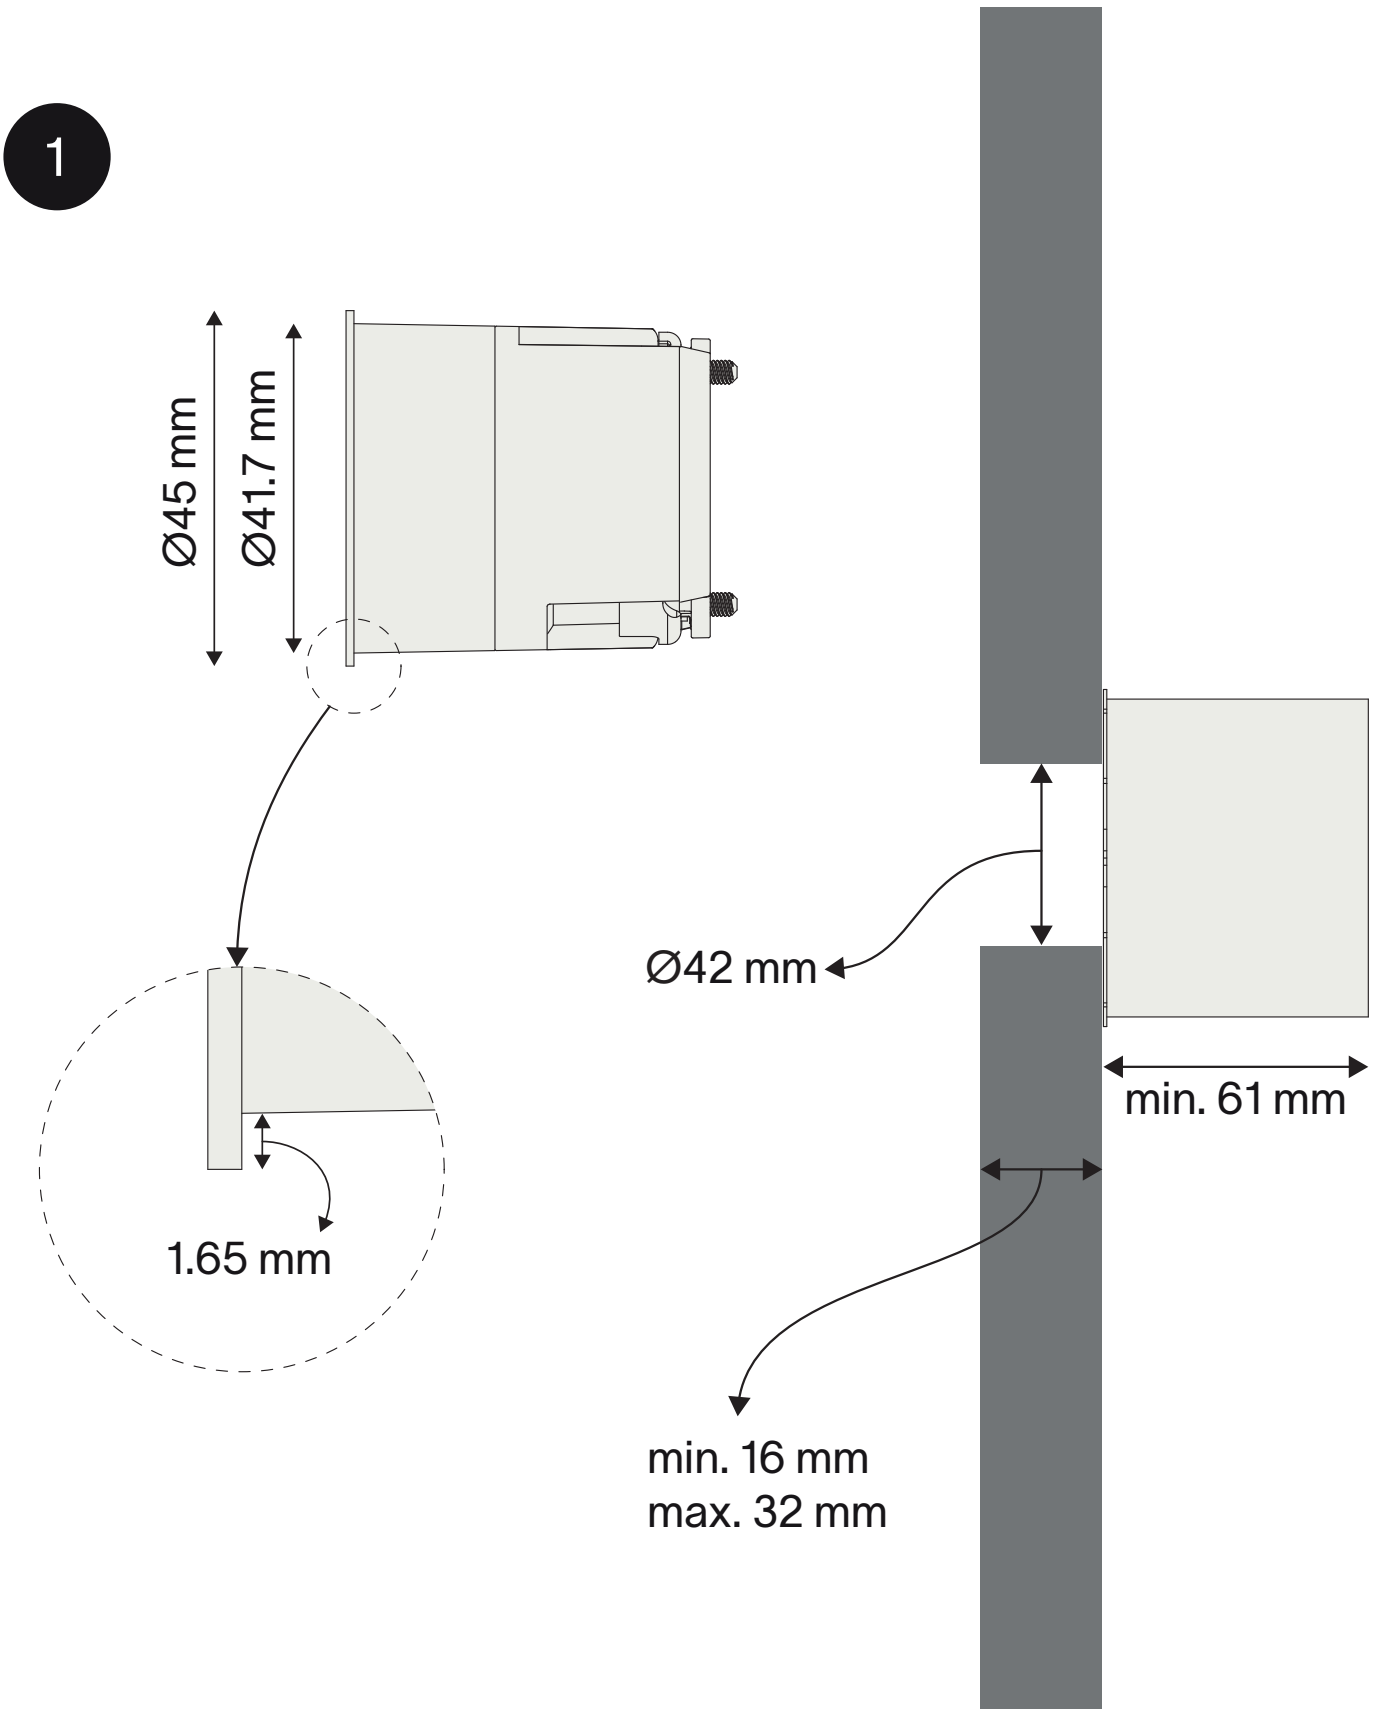
Ø45 mm
Ø41.7 mm
1.65 mm
Ø42 mm
min. 61 mm
min. 16 mm
max. 32 mm

Drill the installation hole and optional countersink.

2


Ø45.2 mm
Ø42 mm

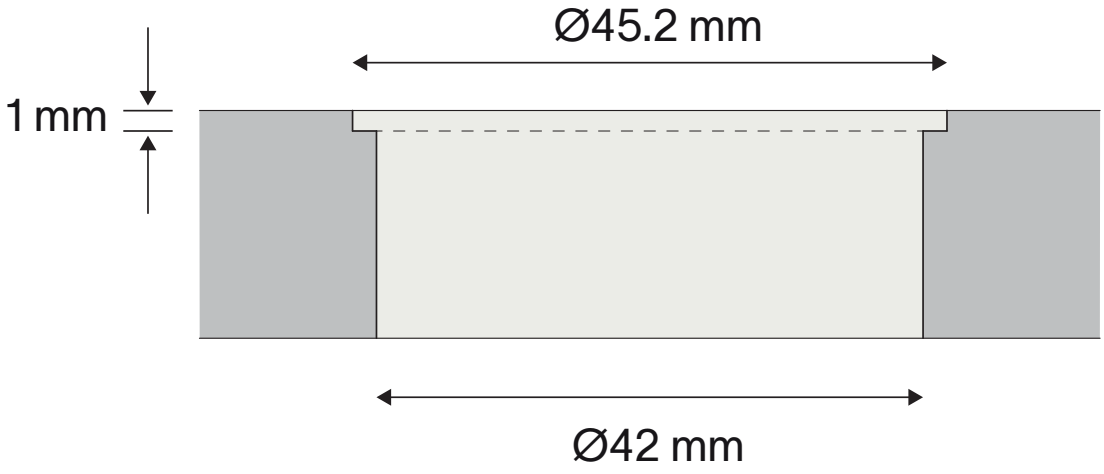
Ø45.2 mm
1 mm
Ø42 mm

Optional flush mount countersink.

3

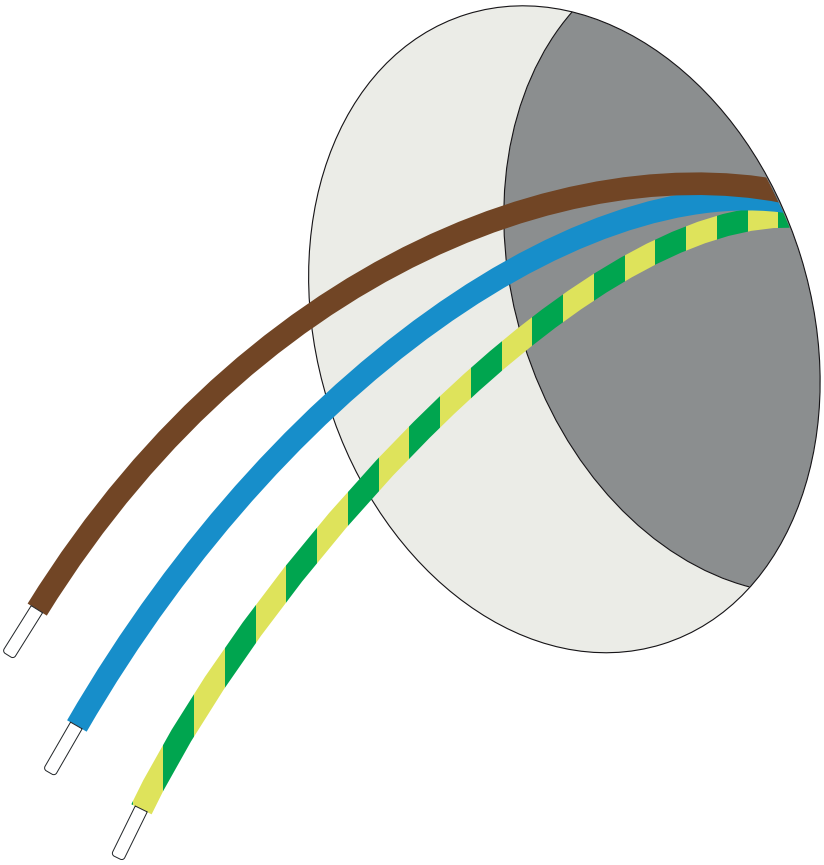



Turn the power off.

4

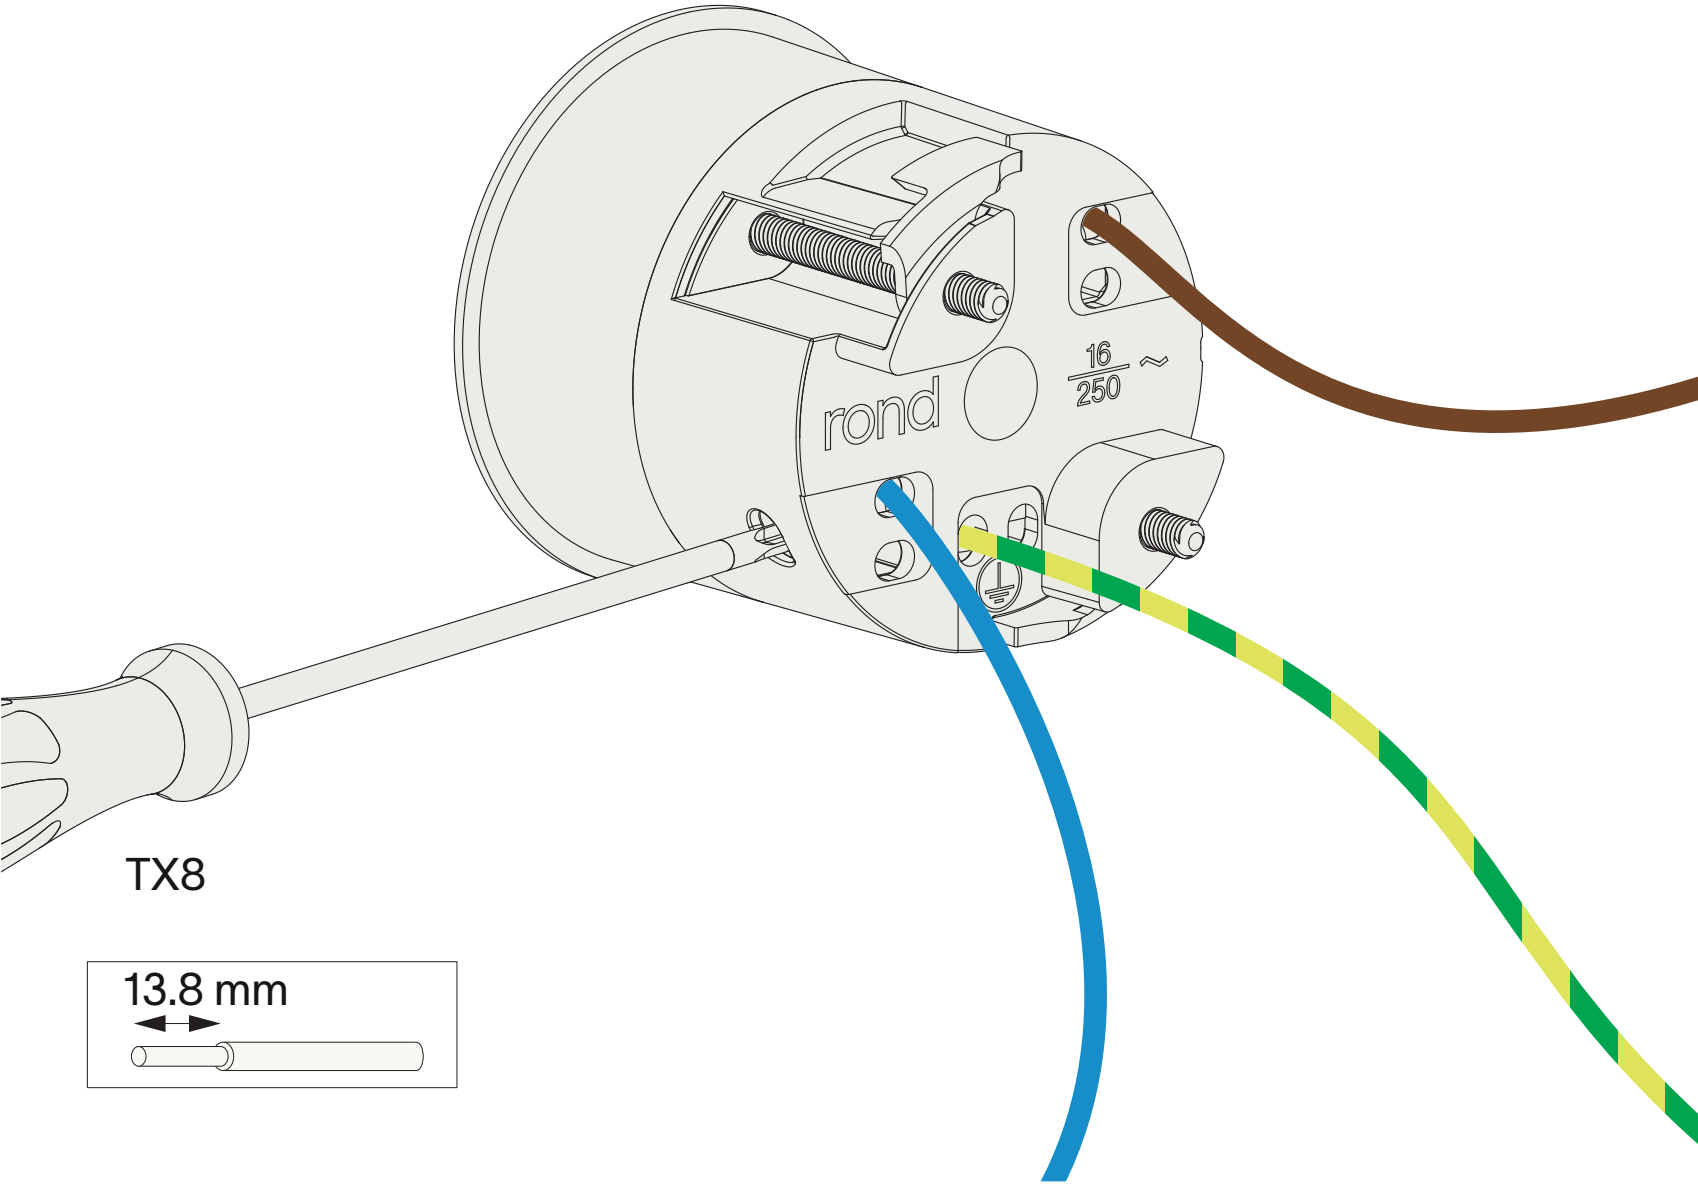
rond
16
250
~
TX8
13.8 mm

Make all necessary connections.

5

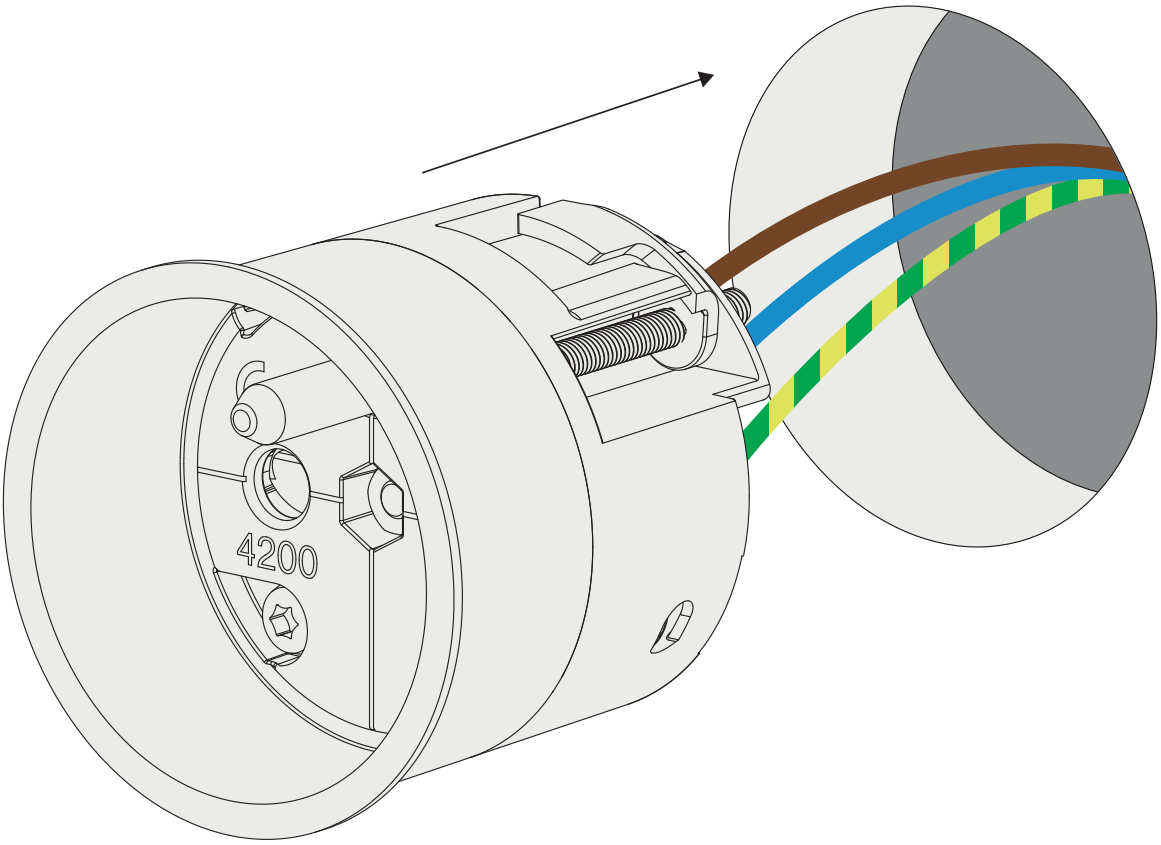

Insert the socket in the hole.

6

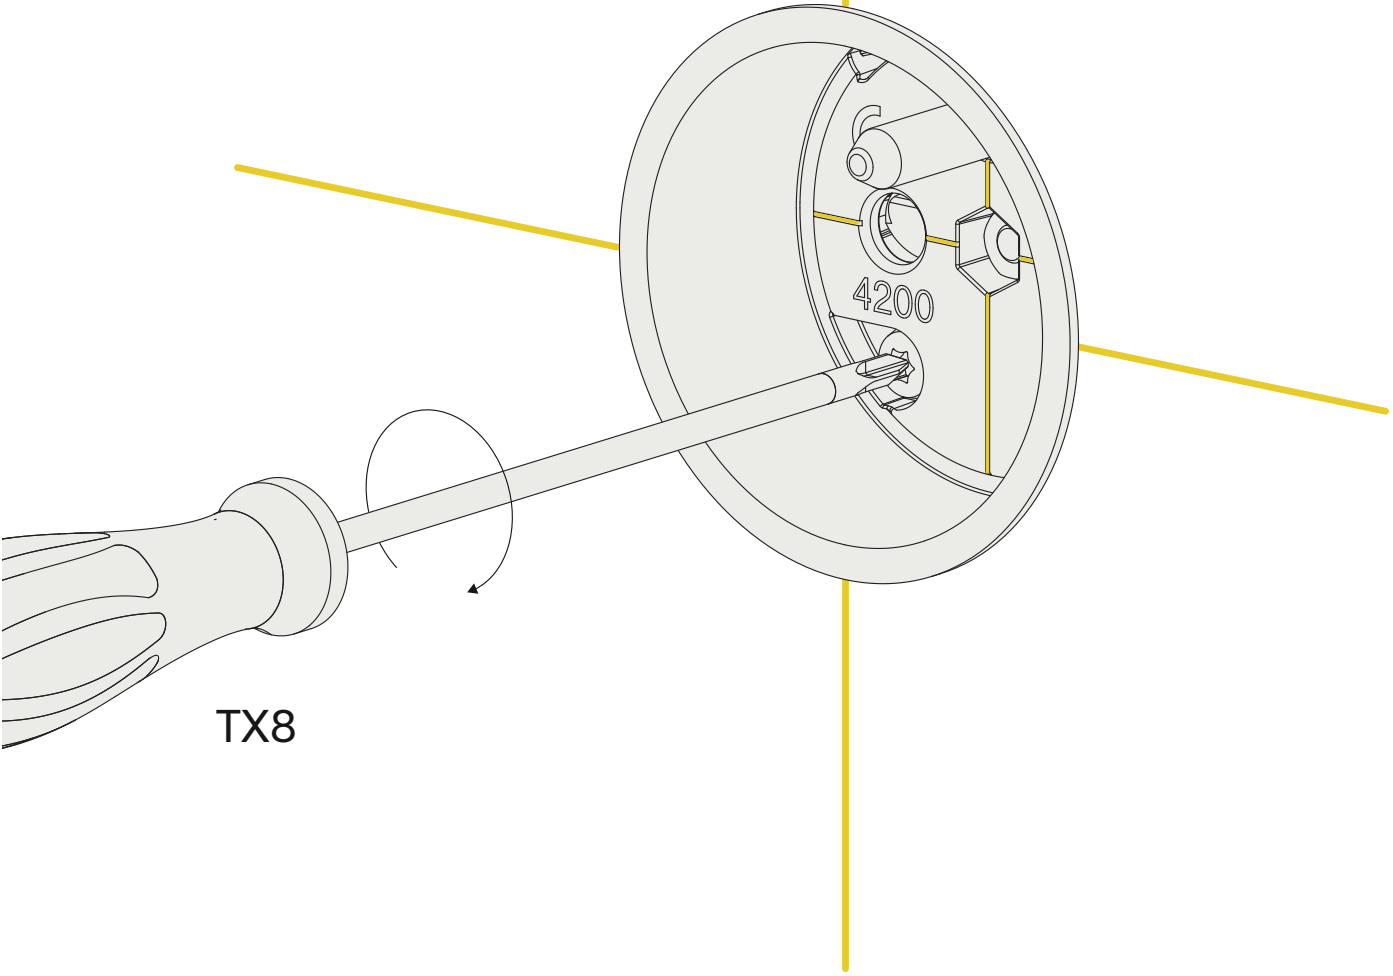

Level the socket and fixate it by tightening the screws.

7

1 2 3

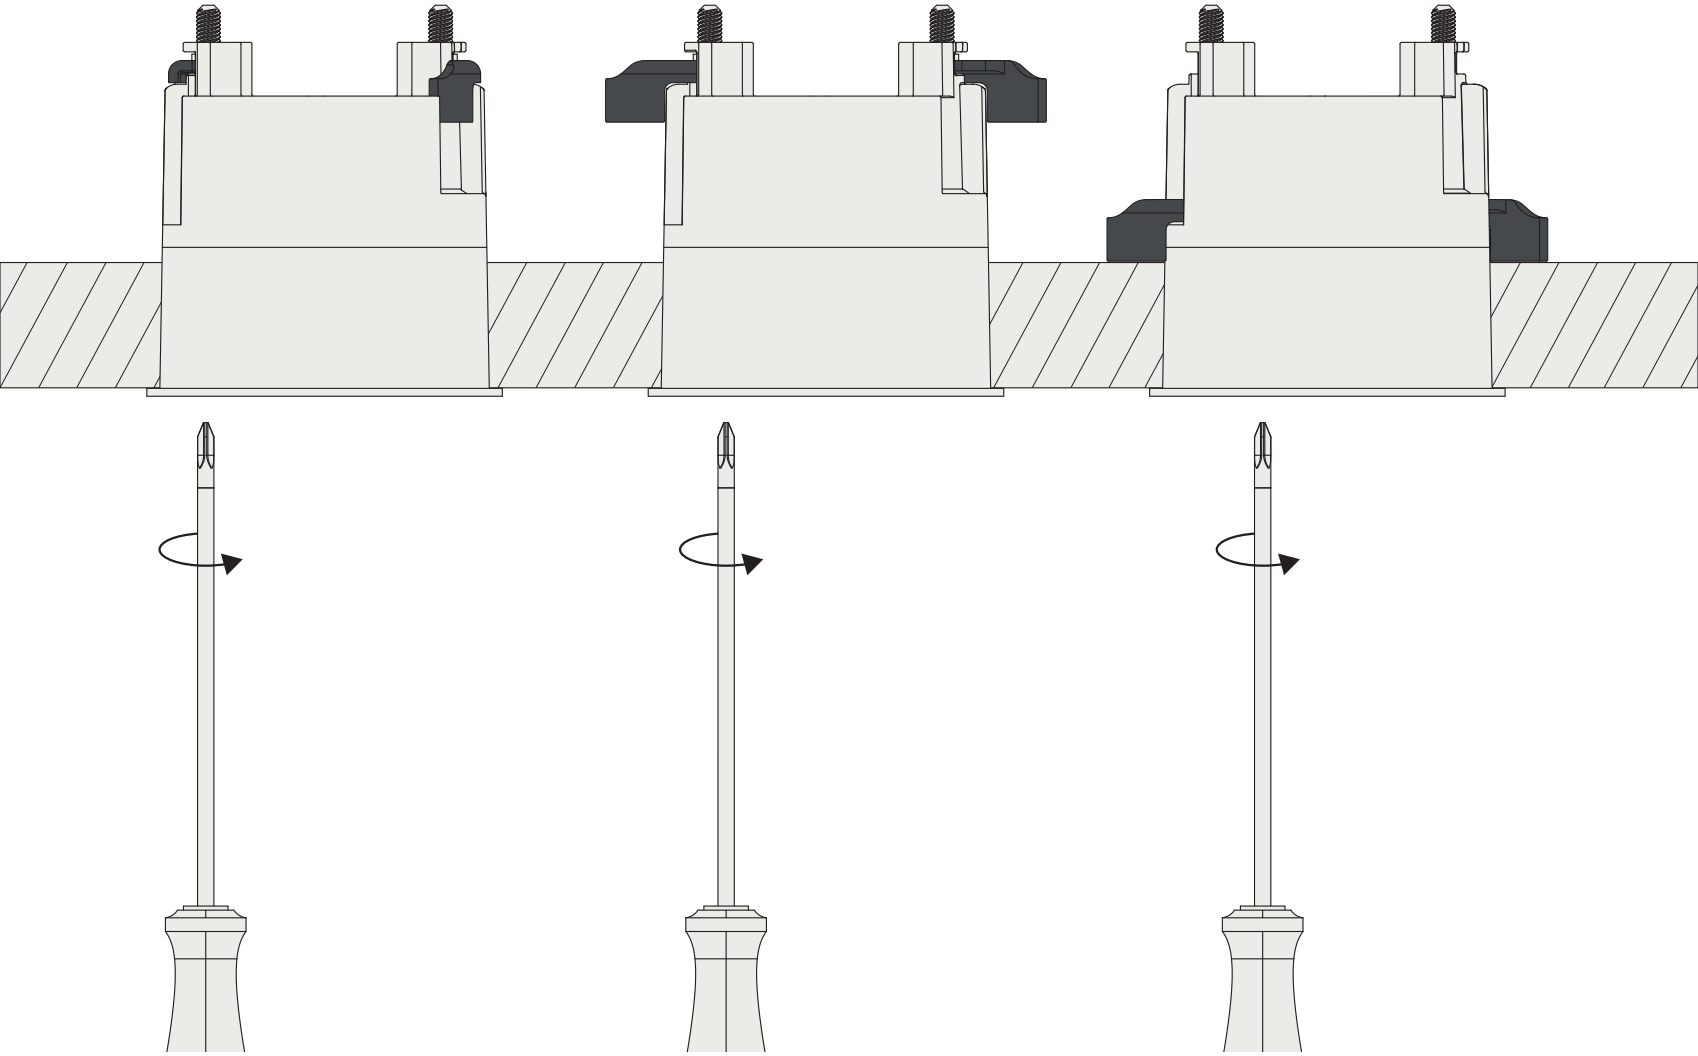

Tighten the screws until the clamps are fully secured.

8

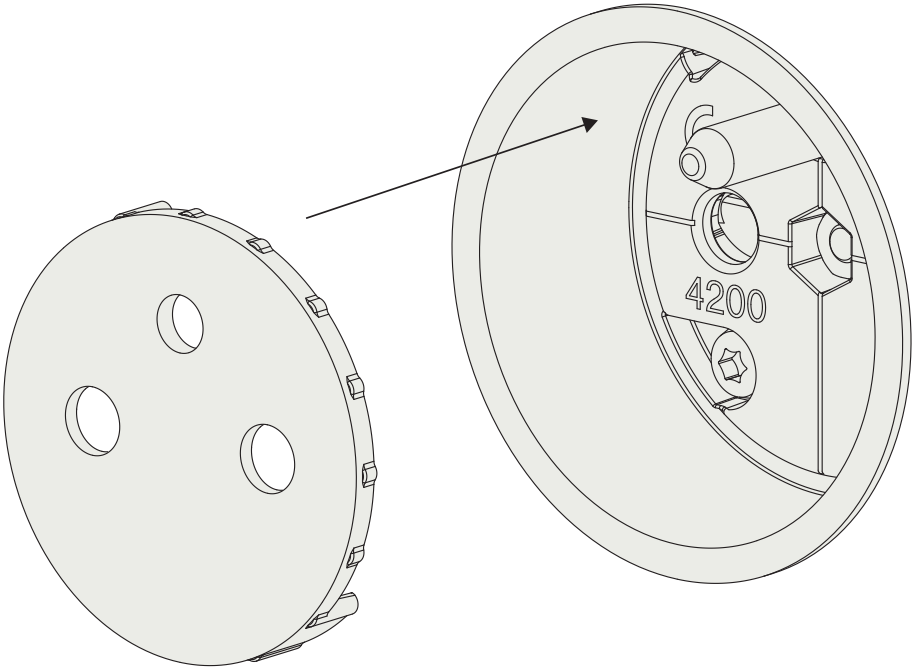

Install the cover plate.

9





Turn the power on.

for removal





Turn the power off before removing the socket.

10

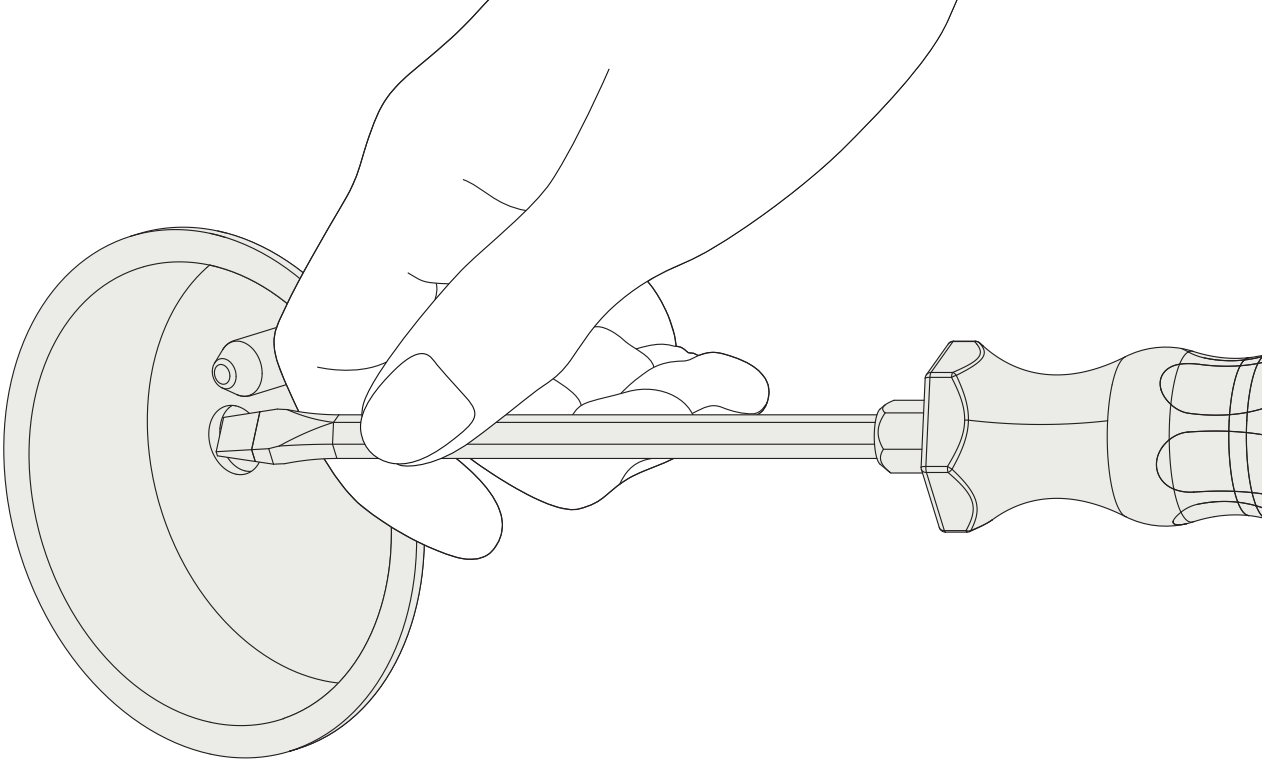

Remove the cover plate with a flat screwdriver. Make sure not to damage the edge of the socket.

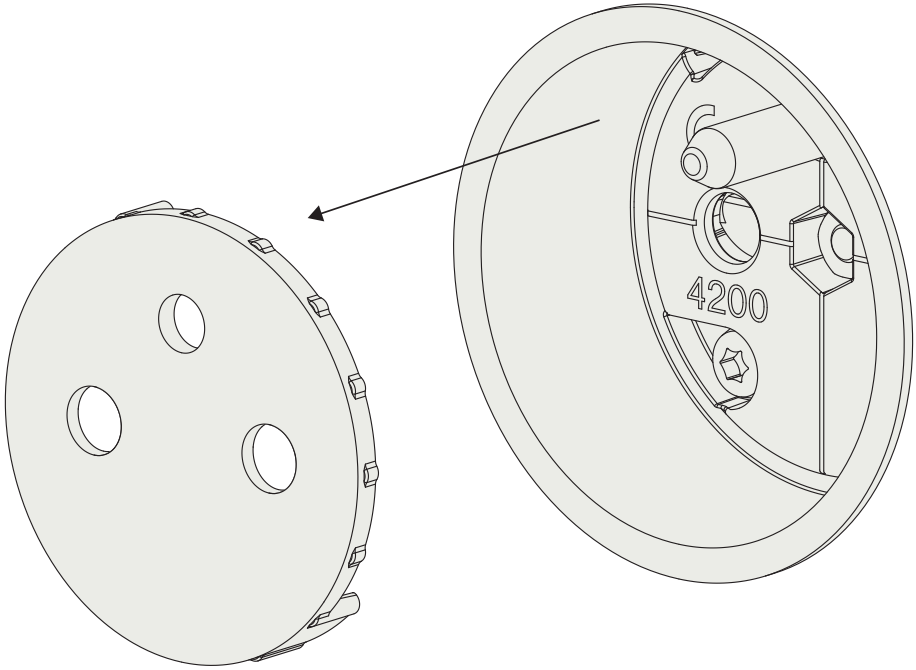

12

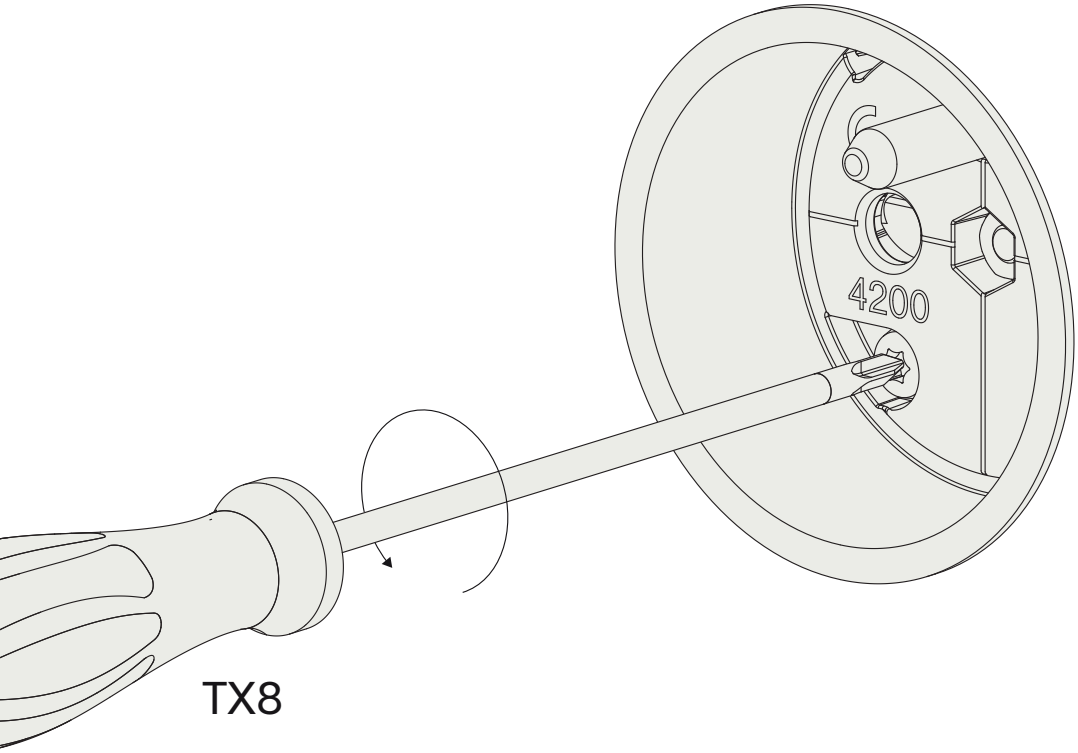

Loosen the screws.

13

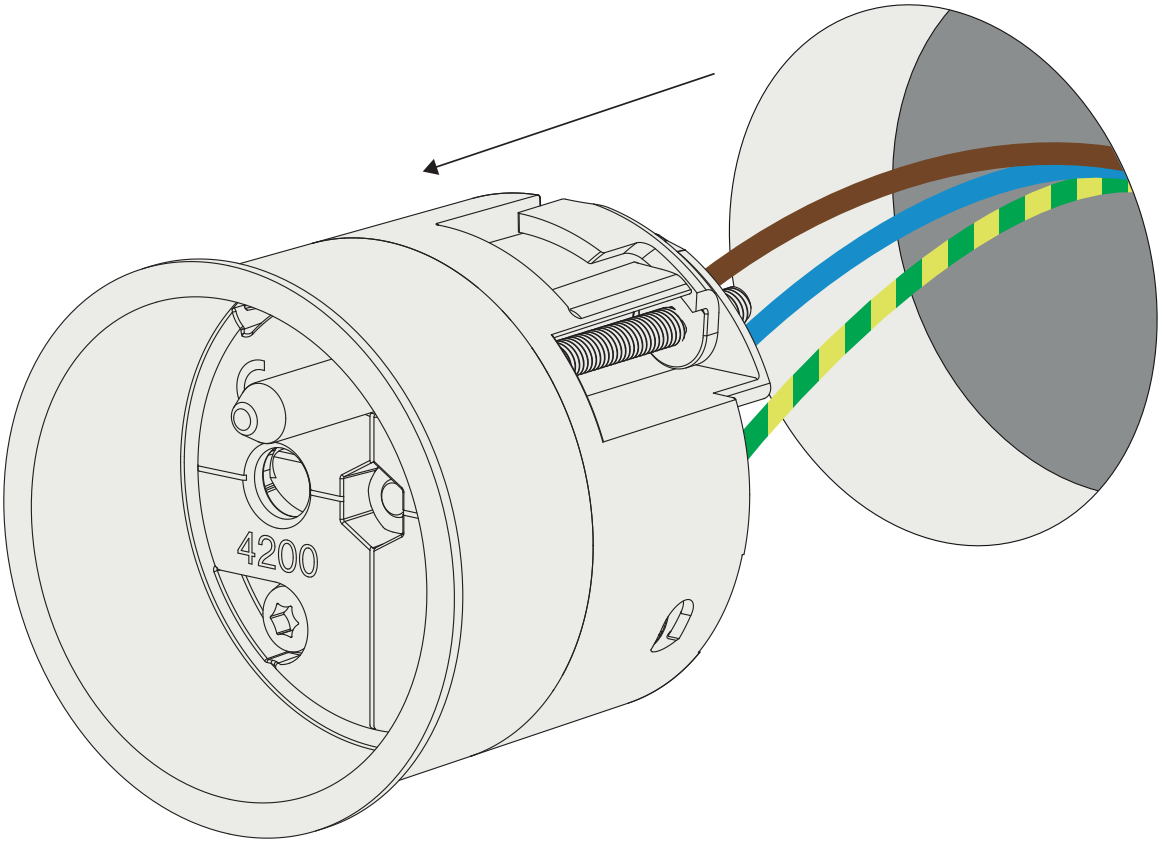

Remove the socket.

thank you for choosing rond

---

rond.io Shiver NV - Handelsstraat 19 - 8630 Veurne - Belgium

Installation must be done by skilled professionals only and instructions must be followed at all times. Warranty will not apply in case of wrongful use of if unskilled personnel attempts to repair a product.